




How to configure your **Aastra 6755i** phone to connect to your RingCentral account


This guide provides instructions for configuring your phone to connect to RingCentral.




From your phone

Follow these steps to access the phone menu to get your IP address.


- 1 Turn on your phone using a POE or adaptor.
- 2 Connect your phone to your LAN line.
- 3 On your phone, press the  icon to open the settings menu.
- 4 In the menu, select **Phone Status**, then press **Select** to continue.

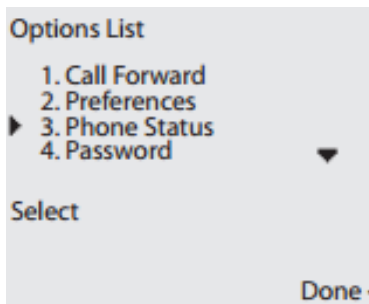

- 5 Select **IP&MAC Addresses**, then press **Select** to continue.

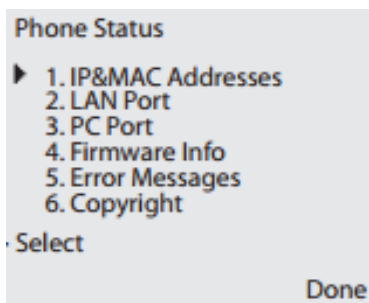


- You'll see the IP address associated with your phone. Write down the IP address and keep it handy. Click **Done** to exit the menu.

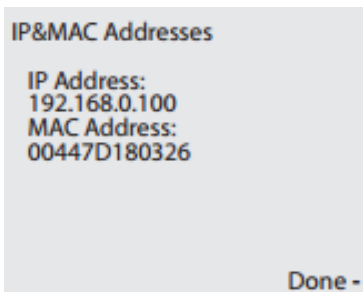

From your computer


Follow these steps to finish configuring your phone.

- In your web browser, type your phone's IP address to go to the Aastra web interface.
- In the Aastra web login page, use **admin** for the username, and **22222** for the password.
- In the left menu, select **Advanced Settings > Line 1** to open the configuration page for your phone.

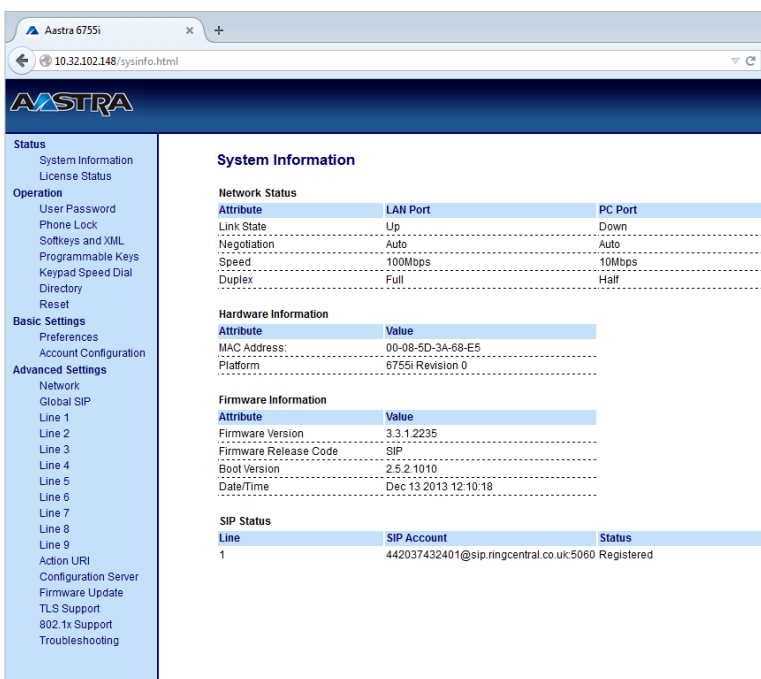

4 Now you need to get the RingCentral provisioning information for your phone. Open another tab or window in your browser, and log into your RingCentral online account with your administrator credentials.

5 Under Phone System, in the left panel, click **Phones & Devices**.

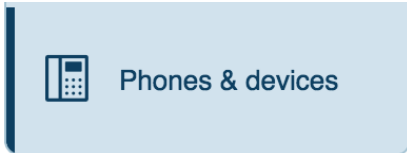

6 Find your phone and select **Setup and Provision**.

User phones					Common phones	Paging devices	Shared lines	Unassigned
Search user phones		Status	Device	+ Add device				
Status	Device	Assigned	Phone number	Serial No.				
✖	Existing phone	Third Party Phone	020 3318 2615	N/A	Setup & Provision			

7 Select the **Other Phone** option.

Select your phone model to begin:

Cisco / Linksys IP Device:

Polycom IP Phone:

Other Phone

8 You can now view the provisioning details you'll need to program in your phone.

Assisted Generic IP Phone / Adaptor Provisioning - Finish ✕

To configure your device to connect to the RingCentral service, you will need to program it with the following information. The steps for programming will vary from device to device, so please check with your device's manufacturer for specific instructions.

Field	Value
SIP Domain	sip.ringcentral.co.uk:5060
Outbound Proxy	sip311.ringcentral.co.uk:5090
User Name	442036952839
Password	2BJ65j7K3e
Authorization ID	3982276064

[Done](#)

9

Go back to the Aastra web interface. On the Configuration page, enter the corresponding values from your RingCentral provisioning page. See graphic below.

In the Basic SIP Authentication Settings section:

- In both the **Phone Number** field and **Caller ID** field, enter the **UserName** value from your RingCentral provisioning page.
- In the **Authentication** name field, enter the corresponding **Authorization ID**.
- In the **Password** field, enter the corresponding **Password** value.

In the Basic SIP Network Settings section:

- In both the **Proxy Server** field and **Registrar Server** field, enter the matching corresponding **SIP Domain** value.
- In the **Outbound Proxy Server** field enter the matching corresponding **Outbound Proxy** value.

Configuration Line 1

Basic SIP Authentication Settings

Screen Name: Ext-400

Screen Name 2:

Phone Number:

Caller ID:

Authentication Name: |

Password: ●●●●●●●●

BLA Number:

Line Mode: Generic

Call Waiting: Global

Basic SIP Network Settings

Proxy Server: sip.ringcentral.co.uk

Proxy Port: 5060

Backup Proxy Server: 0.0.0.0

Backup Proxy Port: 0

Outbound Proxy Server: sip311.ringcentral.co.uk

Outbound Proxy Port: 5090

Backup Outbound Proxy Server: 0.0.0.0

Backup Outbound Proxy Port: 0

Registrar Server: sip.ringcentral.co.uk

Field	Value
SIP Domain	sip.ringcentral.co.uk:5060
Outbound Proxy	sip311.ringcentral.co.uk:5090
User Name	442036952839
Password	2BJ65j7K3e
Authorization ID	3982276064

Field	Value
SIP Domain	sip.ringcentral.co.uk:5060
Outbound Proxy	sip311.ringcentral.co.uk:5090
User Name	442036952839
Password	2BJ65j7K3e
Authorization ID	3982276064

Field	Value
SIP Domain	sip.ringcentral.co.uk:5060
Outbound Proxy	sip311.ringcentral.co.uk:5090
User Name	442036952839
Password	2BJ65j7K3e
Authorization ID	3982276064

Field	Value
SIP Domain	sip.ringcentral.co.uk:5060
Outbound Proxy	sip311.ringcentral.co.uk:5090
User Name	442036952839
Password	2BJ65j7K3e
Authorization ID	3982276064

- 10 When you've entered all the values, click **Done** to save your changes.

Assisted Generic IP Phone / Adaptor Provisioning - Finish ✕

To configure your device to connect to the RingCentral service, you will need to program it with the following information.
The steps for programming will vary from device to device, so please check with your device's manufacturer for specific instructions.

Field	Value
SIP Domain	sip.ringcentral.co.uk:5060
Outbound Proxy	sip311.ringcentral.co.uk:5090
User Name	442036952839
Password	2EJ65J7K3e
Authorization ID	3982276064

Done

- ✓ You're finished! You're now ready to make and receive calls from your RingCentral account.